


HANDY CAP IP™

Exothermic Weld Grounding Connection

Handy Cap IP is a prefabricated assembly designed to provide quick, field-applied corrosion protection to anode and test lead wire welds on metal pipe and tanks. This economical product is ideal for use in limited access applications. New Handy Cap IP now adds the innovative technology of Tapecoat Gray Adhesive to its unique design. The integration of a primer in Tapecoat Gray makes field application of Handy Cap IP easier and more economical.

- **Ideal for Keyhole Applications**
- **Dome and Tunnel Provide Easy Access**
- **Tapecoat Gray Adhesive Eliminates Liquid Primer**
- **Elastomeric Compound Encases Weld Profile**
- **Serrations Conform to Small Diameters**

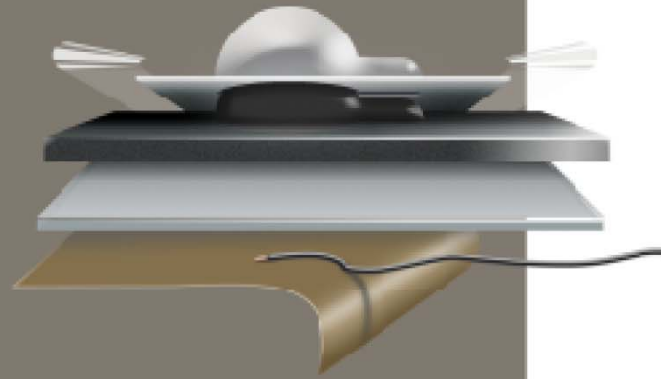


Easy Field-Applied Corrosion Protection

NO LIQUID PRIMER REQUIRED

Tapecoat Gray Adhesive bonds the tough outer shell of the Handy Cap IP to the bare metal weld area and surrounding plant applied coating. Innovative Tapecoat Gray incorporates an integrated primer in its adhesive and provides exceptional bonding without the costly application of liquid primer. A protective compound within the dome molds itself over the irregular welded profile and encases the exothermic connection.

 **CHASE** Specialty Coatings
TAPECOAT® / ROYSTON®

ISO 9001:2008 Registered

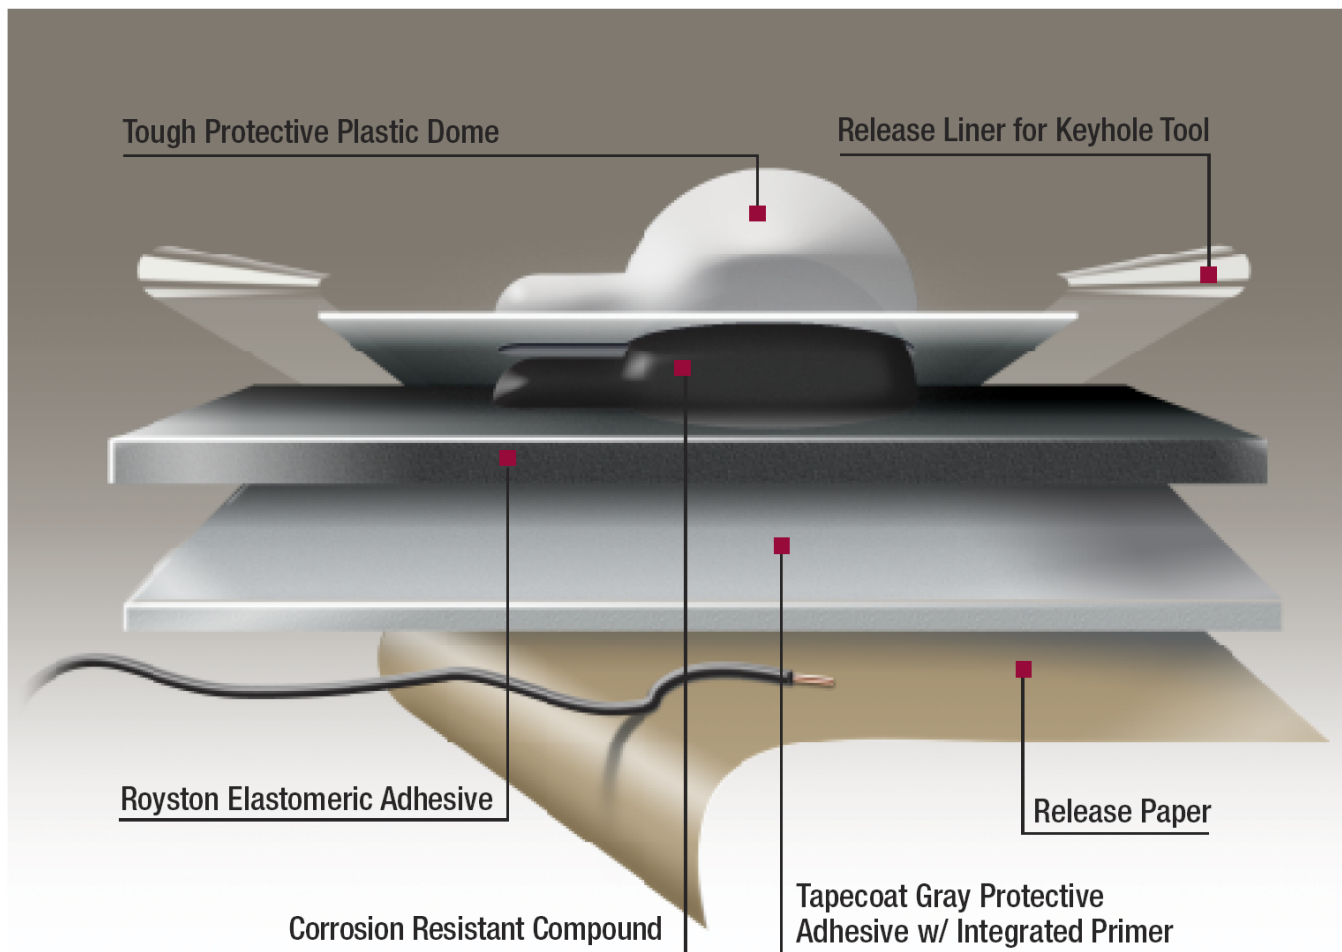

Application Information:

1. Clean all mud, dirt, grease, oil and other contaminants from the metal surface and mill coating which is to be covered. The Handy Cap IP incorporates an integrated primer in its Tapecoat Gray Adhesive and does not require the use of a liquid primer prior to application.

2. Remove the release paper from the bottom of the Handy Cap IP. Bend the plastic sheet inward at the serrations when applying to small diameter pipe. Position and place the Handy Cap IP on the welded area with the tunnel over the lead wire.

3. Push the dome of the cap firmly into the weld area. Lift the lead wire away from the pipe and squeeze the adhesive compound completely around and underneath the wire. Push the lead wire back down on the pipe and press the elastomeric compound into firm contact with the pipe over the entire area.

No further protection is required when the Handy Cap IP covers the entire exposed metal area. Uncovered areas should be protected with primerless Tapecoat or Royston tapes. Remove the narrow plastic release film to accommodate tool use for keyhole applications.

Typical Properties:

Construction - Molded plastic dome filled with corrosion resistant compound on a base of thick elastomeric tape.

Dimension:	Overall: 4" x 4"
	Plastic Sheet: 2.75" x 4" (serrated)
	Sheet Thickness: 10 mils
	Plastic Dome: 1.625" diameter/ .8" height
	Adhesive Thickness: 165 mils
	Weight: 2.8 oz
	Application Temperature: -20°F to 120°F (-29°C to 49°C)
	Service Temperature: -40°F to 150°F (-40°C to 66°C)
	Shelf Life: Rotate yearly



DISTRIBUTED BY:

2201 Harbor St, Unit C
Pittsburg, CA 94565
Tel: 800.878.8837
302 South 700 West
Pleasant Grove, UT 84062
Tel: 801.785.1546

www.corrosioncoatings.com info@corrosioncoatings.com

The information contained here is provided for product selection purposes only and is not to be considered specification or performance data. Under no circumstance will the seller be liable for any loss, damage, expense or incidental or consequential damage of any kind arising in connection with the use or inability to use its product. Specific conditions of sale and Chase's limited warranty are set out in detail in Chase Corporation Terms and Conditions of Sale. Those Terms and Conditions are the only source that contain Chase's limited warranty and other terms and conditions.